

Textured Surface Coating Warranty:

A 10 year full surface coat warranty plus a diminishing pro-rata warranty for a further 10 years.

Structure (B1)

When installed according to the manufactures recommendations the 7 L ORRoofing products will allow provisions of NZBC B1.3.1, B1.3.2 and B1.3.4 to be met for the relevant provisions of B1.3.3.

Durability (B2)

Without recoating, the 7 L ORRoofing products will meet the provisions of NZBC B2.3(C) for 15 years, when used and maintained as directed by our manufacturing installation manual.

WIND ZONES

On new roofs when fixed to battens sized and installed according to NZS 3604 or NZS 4217 7 L ORRoofing Systems are suitable for use in all NZS 3604 building wind zones up to and including VERY HIGH. In NZS 3604 very high building wind zones, battens are to be secured using 2 x 90 x 3.15 power driven nails for the Main & Periphery roof areas. On existing roofs when fixed to counter battens correctly installed the 7 L ORRoofing Systems is suitable for use in all NZS 3604 building wind zones up to and including VERY HIGH.


Counter battens should be at 600mm centres with existing purlin centres at 750mm and 450mm when centres are 900mm. at roof edge counter battens are fixed as per NZS 4217.

SNOW LOADING

The 7 L ORRoofing products are suitable for use where buildings are designed for the 1kPa snow loading.

WATER SUPPLIES (G12)

Rainwater collected from Tilcor roofs will meet the provisions of NZBC G12.3.1, providing the surface coating is maintained as directed. It is recommended that a potable water collection system is not installed until 3 good rainfalls have washed the new roof surface. Similarly when the roof is cleaned with MossBoss to remove mould and algae during maintenance the water supply should also be disconnected as directed.

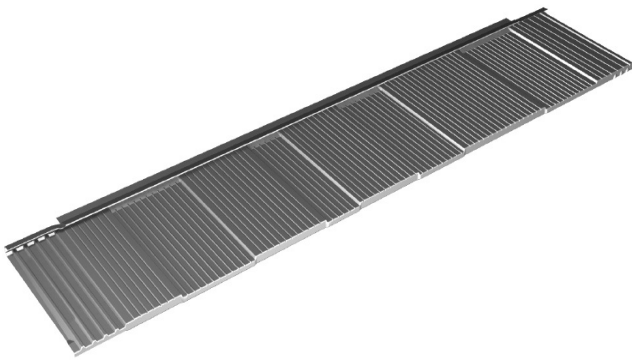

Specifications

<u>CF Slate</u>	<u>Textured</u>
Overall Length:	1340 mm
Length of Cover:	1250 mm
Width of Cover:	255 mm
Roof Cover / CF Slate:	0.32
Tiles / m2:	3.2
Weight / Tile:	2.0 kgs
Weight / m2:	6.40 kgs
Minimum Roof Pitch:	20 deg